



DUNE MAX

www.armstrong-ceilings.co.uk
www.armstrong-ceilings.ie

Armstrong®

DUNE MAX



Recycled Content

45%
EN ISO
14021









Light Reflectance

84%
EN ISO
7742-2 & 3



Concentration

DUNE MAX

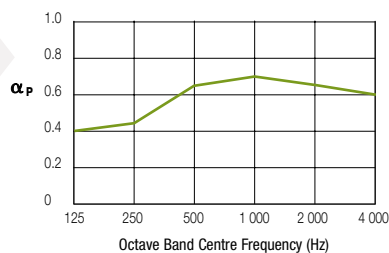
	BOARD	TEGULAR	MICROLOOK
	 Prelude XL ² /TLX 24 mm Prelude Sixty ²	 Prelude XL ² /TLX 24 mm Prelude Sixty ²	 Prelude XL ² /TL 15 mm Interlude XL ² 15 mm
			
600 x 600 x 18 mm	2250 M	2252 M	2253 M
600 x 1200 x 18 mm	2251 M		



EN ISO 354 &
EN ISO 11654

α_w	NRC	125	250	500	1000	2000	4000	Hz
0.65	0.60	0.40	0.45	0.65	0.70	0.65	0.60	α_p

Sound Absorption Class = C



EN 20140-9
& EN 717-1

Dnfw
35 dB



EN ISO 140-3
& EN ISO 717-1

Rw
17 dB



EN 13501-1

EEA Euroclass A2-s1, d0
RUS KM1 (G1, V1, D1, T1) FZ 123

USA ASTM E84: Flame Spread Index \leq 25; Smoke Developed Index \leq 50
ASTM E1264: Class A



EN 12667
& ISO 8301

$\lambda = 0.06 \text{ W/m K}$



99 % RH



LIFE TIME
guarantee



4.55 kg/m²

Please contact our Armstrong Technical Sales Group for further details.

www.armstrong-ceilings.co.uk
www.armstrong-ceilings.ie

Armstrong®